

SINEAX VK 636

Programmable Temperature Transmitter with PROFIBUS-PA protocol

for installation in the terminal head of a temperature sensor DIN 43 729, shape B



Application

The **SINEAX VK 636** is a temperature transducer for use in automation systems with PROFIBUS.

It converts the measured value, i.e. the signal from a thermocouple or a resistance thermometer to the PROFIBUS-PA format.

PROFIBUS-PA (**P**rocess **A**utomation) is an open field bus standard according to EN 50 170 and IEC 61 158-2 that requirements of the process industries.

Both the communication and power supply are via the bus conductors.

The measured variables, ranges and other parameters can be configured and set on a PC (Master Class 2) running the respective configuration software.



Fig. 1. Measuring transmitter SINEAX VK 636 with PROFIBUS-PA protocol.

Features / Benefits

- Measuring transmitter with bus acc. to EN 50170 and IEC 61158-2
- Digital communication and power supply via the bus conductors / saving of installation costs
- Measured variables, ranges and other parameters configured and set using Master (Class 2) / Simplifies project planning and engineering, short delivery times, low stocking levels

- Open and short-circuit sensor circuit supervision acc. to Profil 3.0
- Terminals with captive screws

Measured variables	Measuring ranges		
	Limits	Min. span	Max. span
Temperatures with resistance thermometers for two, three or four-wire connection Pt 100, IEC 60 751 Ni 100, DIN 43 760	- 200 to 850 °C	50 K	850 K
	- 60 to 250 °C	50 K	250 K
Temperatures with thermocouples Type B, E, J, K, N, R, S, T acc. to IEC 60 584-1 Type L and U, DIN 43 710 Type W5 Re/W26 Re, Type W3 Re/W25 Re acc. to ASTM E 988-90	acc. to type	2 mV	80 mV

Standard version

The following versions are available as standard versions already programmed for the **basic** configuration. It is only necessary to quote the **Order No.:**

Table 1:

Version	Dimensions Ø 43 mm	Order Code	Order No.
Standard, electrically isolated	Height 30.8 mm	636-7C0	141 937
EEx ia IIC T6, electrically isolated		636-7D0	141 945

Please complete the Order Code 636-7.1. according to "Table 2: Specification and ordering information" for versions with user-specific input ranges.

Basic configuration:	Measuring input	Pt 100 fo three-wire connection
	Measuring range	0 ... 600 °C
	Response time:	Approx. 1.5/2 s
	Mains ripple suppression:	50 Hz
	Device address:	126

- Electrical insulation (test voltage 1500 V AC)
- Available in type of protection "Intrinsic safety" EEx ia IIC T6 (see "Table 3: Data on explosion protecton")

SINEAX VK 636

Programmable Temperature Transmitter with PROFIBUS-PA protocol

Configurations and settings

A Master Class 2, the basic device file (GSD), the device description (DD) and the respective configuration software are needed to configure and set the transmitter. The hardware required includes an DP cable, a bus coupler and an ancillary two-wire cable.

The connections between "Master Class 2 ↔ bus coupler ↔ SINEAX VK 636" can be seen from Fig. 2.

The bus coupler compensates the level between RS 485 and IEC 61158-2 and also establishes the power supply connection between the Master Class 2 and the SINEAX VK 636 transmitter.

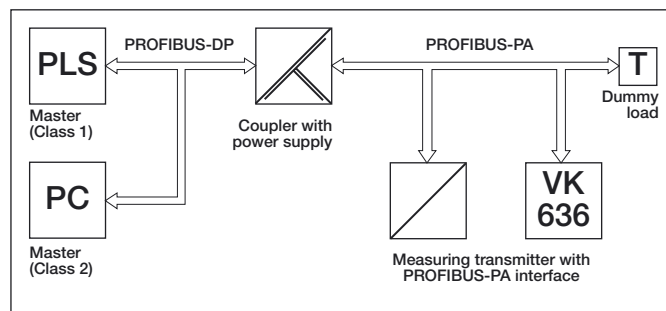


Fig. 2. Communication by PROFIBUS-PA interface.

Technical Data

Measuring input

Temperature with resistance thermometers

Measuring range limits:	See table 4
Resistance types:	Type Pt 100 (IEC 60 751) Type Ni 100 (DIN 43 760) other sensor types configurable
Measuring current:	≤ 0.20 mA
Standard circuit:	1 resistance thermometer for two , three or four -wire connection
Input resistance:	$R_i > 10 \text{ M}\Omega$
Lead resistance:	≤ 30 Ω per lead

Temperature with thermocouple

Measuring range limits:	See table 4
Thermocouple pairs:	Type B: Pt30Rh-Pt6Rh (IEC 584) Type E: NiCr-CuNi (IEC 584) Type J: Fe-CuNi (IEC 584) Type K: NiCr-Ni (IEC 584) Type L: Fe-CuNi (DIN 43710) Type N: NiCrSi-NiSi (IEC 584) Type R: Pt13Rh-Pt (IEC 584) Type S: Pt10Rh-Pt (IEC 584) Type T: Cu-CuNi (IEC 584) Type U: Cu-CuNi (DIN 43710) Type W5 Re/W26 Re (ASTM) Type W3 Re/W25 Re (E 988-90)

Standard circuit:	1 thermocouple, internal cold junction compensation with built-in Pt100 or 1 thermocouple, external cold junction compensation
Input resistance:	$R_i > 10 \text{ M}\Omega$

Cold junction compensation:

Internal:	With built-in Pt 100 or with Pt 100 connected to the terminals
External:	Via cold junction thermostat 0 ... 60 °C, configurable

Measuring output

Communication protocol:	Profibus PA (Profil for Process Control, Version 3.0)
Data transfer:	Acc. to IEC 61158-2
Bus termination:	External
Transmission speed:	31.25 kbit/s
Power supply:	Via the usual bus couplers according to IEC 61158-2. The VK 636 explosion protection type "intrinsically safe" ($U_i = 17.5 \text{ V}$, $I_i = \text{any value}$, $C_i \leq 5 \text{ nF}$, $L_i \leq 10 \mu\text{H}$) corresponds to the FISCO model. It is therefore suitable for connection to FISCO model bus couplers.

For other types of connection, as for the FISCO model, the data are: $U_i = 24 \text{ V}$, $I_i = 250 \text{ mA}$, $P_i = 1.2 \text{ W}$, $C_i \leq 1.15 \text{ nF}$, $L_i \leq 3 \mu\text{H}$. These values may not be exceeded by the power supply connected.

More information on the FISCO model may be obtained from the PTB report W53 and other sources.

Configuration and setting connector

Interface:	Output terminals
------------	------------------

Accuracy data (acc. to EN/IEC 60 770-1)

Reference value:	Measuring span
Basic accuracy:	Error limits ≤ ± 0.2% at reference conditions

Reference conditions

Ambient temperature:	23 °C
Power supply:	18 V DC
Settings:	Pt100, 3-wire, 0...600 °C

SINEAX VK 636

Programmable Temperature Transmitter with PROFIBUS-PA protocol

Additional errors (additive)

Low measuring ranges

Voltage measurement:	$\pm 5 \mu\text{V}$ at measuring spans < 10 mV
Resistance thermometer:	$\pm 0.3 \text{ K}$ at measuring spans < 400 °C

Thermocouple:

Type U, T, L, J, K, E	$\pm 0.1 \text{ K}$ at measuring spans < 200 °C
Type N	$\pm 0.13 \text{ K}$ at measuring spans < 320 °C
Type S, R	$\pm 0.42 \text{ K}$ at measuring spans < 1000 °C
Type B	$\pm 0.6 \text{ K}$ at measuring spans < 1400 °C

High initial value: (Additional error = Factor · Initial value)

	Factor
Voltage measurement:	$\pm 0.1 \mu\text{V} / \text{mV}$
Resistance thermometer:	$\pm 0.00075 \text{ K} / ^\circ\text{C}$
Thermocouple:	
Type U, T, L, J, K, E	$\pm 0.0006 \text{ K} / ^\circ\text{C}$
Type N	$\pm 0.0008 \text{ K} / ^\circ\text{C}$
Type S, R	$\pm 0.0025 \text{ K} / ^\circ\text{C}$
Type B	$\pm 0.0036 \text{ K} / ^\circ\text{C}$

Influence of lead resistance at resistance thermometer: $\pm 0.01\%$ pro Ω

Internal cold junction compensation: $\pm 0.5 \text{ K}$

Linearisation: $\pm 0.3\%$

Influencing factors

Temperature: $\leq \pm (0.15\% + 0.15 \text{ K})$ per 10 K with temperature measurement
 $\leq \pm (0.15\% + 12 \mu\text{V})$ per 10 K with voltage measurement

Long-time drift: $\leq \pm 0.1\%$

Common and transverse mode influence: $\leq \pm 0.2\%$

Failure signal

Status signal: According to the PROFIBUS-PA® Profil 3.0

Installation data

Dimensions: See section "Dimensional drawing"

Housing: Lexan 940 (polycarbonate)
 Flammability class V-0 acc. to UL 94, self-extinguishing, non-dripping, free of halogen

Mounting position: Any

Electrical connections: Screw terminals with Philips heads for max. 2 x 1.5 mm²

Weight: Approx. 80 g

Mounting: In terminal head, shape B, by two M4 cheese-headed screws and two springs

Standards

Electromagnetic compatibility: The standards EN 50 081-2 and EN 50 082-2 are observed

Intrinsically safe: Acc. to EN 50 020

FISCO: Draft
 DIN IEC 31G/89/NP;
 June 2001

Protection (acc. to IEC 529 resp. EN 60 529): Housing IP 40
 Terminals IP 00

Electrical standards: Acc. to IEC 1010 resp. EN 61 010

Test voltage: 1500 V AC applied between measuring input and output

Ambient conditions

IEC 68-1-1/-2/-3/-6/-27 resp.
 EN 60 068-2-1/-2/-3/-6/-27 Ambient tests
 - 1 Cold, - 2 Dry heat, - 3 Damp heat, - 6 Vibrations, - 27 Shock

Ambient temperature range: Standard instruments:
 - 25 to + 80 °C

Ex instruments:
 - 25 to max. 45 °C, T6
 - 25 to max. 60 °C, T5
 - 25 to max. 80 °C, T4

Storage temperature range: - 40 to + 80 °C

Annual mean relative humidity: $\leq 75\%$, no moisture condensation

Altitude: 2000 m max.

Indoor use statement!

SINEAX VK 636

Programmable Temperature Transmitter with PROFIBUS-PA protocol

Table 2: Specification and ordering information

Features, Selection	Blocking code	no-go with blocking code	Article No./ Feature
Order Code 636 – xxxx xxxx xxx			636 –
1. Housing 7) For installation in a terminal head DIN 43 729, shape B			7
2. Version C) Not intrinsically safe D) EEx ia IIC T6, intrinsically safe electrical circuits			C D
3. Configuration 0) Basic configuration programmed, (Pt100, 3-wire, 0 ... 600 °C) 1) Configured to order Line 0: All types with basic configuration are available as standard versions, see table 1, specification complete! Line 1: The following features 4 to 10 must be fully specified!.	G		0 1
4. Measuring unit 1) Temperatures in °C 2) Temperatures in °F 3) Temperatures in K			1 2 3
5. Measuring mode, input connection Thermocouple 1) Internal cold junction compensation, with built-in Pt100 2) External cold junction compensation t_k Resistance thermometer 3) Two-wire connection R_L [Ω] 4) Three-wire connection, $R_L \leq 30 \Omega$ / wire 5) Four-wire connection, $R_L \leq 30 \Omega$ / wire Line 2: Specify external cold junction temperature t_k (in °C, °F or K, acc. to specification in Feature 4), any value between 0 and 60 °C or equivalent. Line 3: Specify total lead resistance R_L [Ω], any value between 0 and 60 Ω	T T R R R	G G G G G	1 2 3 4 5
6. Sensor type / measuring range Sensor type / beginning ... end value of measuring range 1) RTD Pt 100 Range 2) RTD Ni 100 Range B) TC Type B Range E) TC Type E Range J) TC Type J Range K) TC Type K Range L) TC Type L Range N) TC Type N Range R) TC Type R Range S) TC Type S Range T) TC Type T Range U) TC Type U Range W) TC W5-W26Re Range X) TC W3-W25Re Range Specify measuring range in [°C], [°F] or [K]; refer to table 4 for the operating limits for each type of sensor.			1 2 B E J K L N R S T U W X

SINEAX VK 636

Programmable Temperature Transmitter with PROFIBUS-PA protocol

Features, Selection	Blocking code	no-go with blocking code	Article No./ Feature
Order Code 636 – xxxx xxxx xxx			636 –
7 Open and short-circuit sensor signalling (failure signal*) Output response for an open or short-circuit* sensor			
0) Output at 110%			0
1) Output at [%]		G	1
2) Hold output at last value		G	2
A) No signal		G	A
Line 1: Any value between - 5 and < 110 *) Status signal according to the PROFIBUS-PA® Profil 3.0			
8. Filter time constant			
0) Standard setting time approx. 2 s			0
9) Setting time [s]		G	9
9. Mains ripple suppression			
0) Frequency 50 Hz			0
1) Frequency 60 Hz		G	1
11. Test certificate			
0) Without test certificate			0
D) Test certificate in German		G	D
E) Test certificate in English		G	E

Lines with letter(s) under "no-go" cannot be combined with preceding lines having the same letter under "blocking code".

Table 3: Data on explosion protection  **II 2 (1) G**

Order Code	Type of protection Marking	Electrical data cc. to Certificate		Certificate	Mounting location of the instrument
		Sensor input	Output		
636 - 7D	EEx ia IIC T6	$U_o = 6.5 \text{ V}$ $I_o = 3 \text{ mA}$ $P_o = 4.8 \text{ mW}$ $C_o = 24 \text{ nF}$ $L_o = 1 \text{ mH}$	FISCO $U_i = 17.5 \text{ V}$ $I_i, P_i = \text{any}$ $C_i \leq 1.15 \text{ nF}$ $L_i \leq 3 \mu\text{H}$ oder $U_i = 24 \text{ V}$ $I_i = 250 \text{ mA}$ $P_i = 1.2 \text{ W}$ $C_i \leq 1.15 \text{ nF}$ $L_i \leq 3 \mu\text{H}$	EC-type-examination Certificate ZELM 01 ATEX 0070	Within the hazardous area, Zone 1 and 2*

* It is permissible for the sensor circuit to enter Zone 0, however, EN 50 284 and any applicable national standards must be observed.

SINEAX VK 636

Programmable Temperature Transmitter with PROFIBUS-PA protocol

Table 4: Temperature measuring ranges

Measuring ranges [°C]	Resistance thermometers		Thermocouples											
	Pt100	Ni100	B	E	J	K	L	N	R	S	T	U	C ¹⁾	D ²⁾
0... 40	X			X	X		X							
0... 50	X	X		X	X	X	X				X	X		
0... 60	X	X		X	X	X	X				X	X		
0... 80	X	X		X	X	X	X	X			X	X		
0... 100	X	X		X	X	X	X	X			X	X		
0... 120	X	X		X	X	X	X	X			X	X		
0... 150	X	X		X	X	X	X	X			X	X	X	
0... 200	X	X		X	X	X	X	X			X	X	X	X
0... 250	X	X		X	X	X	X	X			X	X	X	X
0... 300	X			X	X	X	X	X	X	X	X	X	X	X
0... 400	X			X	X	X	X	X	X	X	X	X	X	X
0... 500	X			X	X	X	X	X	X	X		X	X	X
0... 600	X			X	X	X	X	X	X	X		X	X	X
0... 800	X		X	X	X	X	X	X	X	X			X	X
0... 900			X	X	X	X	X	X	X	X			X	X
0...1000			X	X	X	X		X	X	X			X	X
0...1200			X		X	X		X	X	X			X	X
0...1500			X						X	X			X	X
0...1600			X						X	X			X	X
0...1800			X										X	X
0...2000													X	X
50... 150	X	X		X	X	X	X	X			X	X		
100... 300	X			X	X	X	X	X			X	X	X	X
200... 500	X			X	X	X	X	X	X	X		X	X	X
300... 600	X			X	X	X	X	X	X	X		X	X	X
600... 900			X	X	X	X	X	X	X	X			X	X
600...1000			X	X	X	X		X	X	X			X	X
900...1200			X		X	X		X	X	X			X	X
600...1600			X						X	X			X	X
600...1800			X										X	X
-10... 40	X	X		X	X	X	X					X		
-30... 60	X	X		X	X	X	X	X			X	X		
Measuring range limits [°C]	-200 to 850	-60 to 250	0 to 1820	-270 to 1000	-210 to 1200	-270 to 1372	-200 to 900	-270 to 1300	-50 to 1769	-50 to 1769	-270 to 400	-200 bis 600	0 to 2315	0 to 2315
	ΔR min. 15 Ω at final value ³⁾ \leq 400 Ω ΔR min. 150 Ω at final value $>$ 400 Ω max. final value 4000 Ω Initial value $\frac{\quad}{\Delta R} \leq 10$		ΔU min. 2 mV, max. 80 V $\frac{\text{Initial value}}{\Delta U} \leq 10$											

¹⁾ W5 Re W26 Re (ASTM E 988-90)


²⁾ W3 Re W25 Re (ASTM E 988-90)

³⁾ For two-wire connection, the final value is made up of the measured final value [Ω] plus the total resistance of the leads.

SINEAX VK 636

Programmable Temperature Transmitter with PROFIBUS-PA protocol

Electrical connections

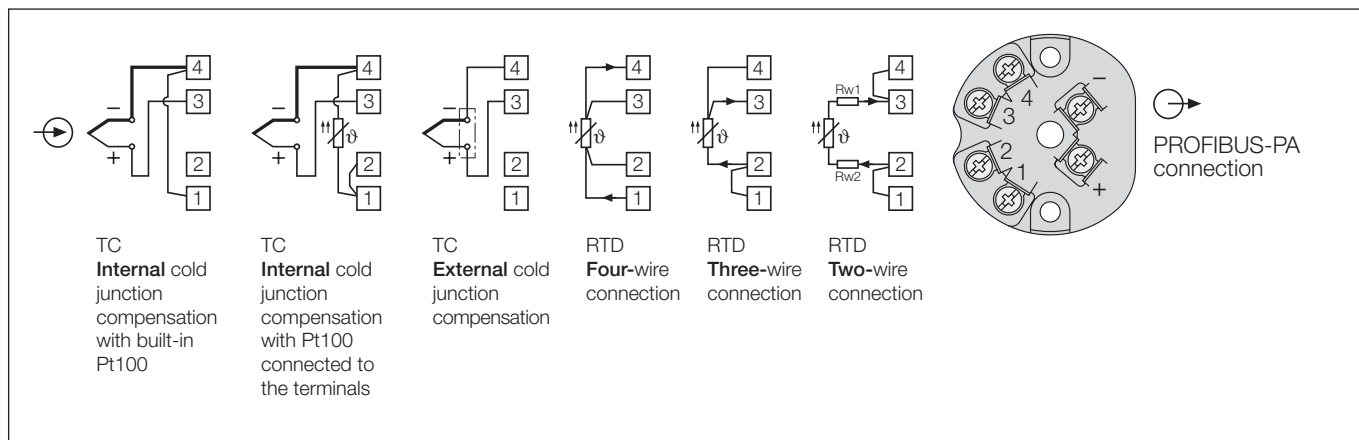

= Measuring input

= PROFIBUS-PA connection

Table 5: Accessories and spare parts

Description	Order Nr.
Operating Instructions VK 636 Bd in German	141 979
Operating Instructions VK 636 Bf in French	142 092
Operating Instructions VK 636 Be in English	142 141

Dimensional drawing

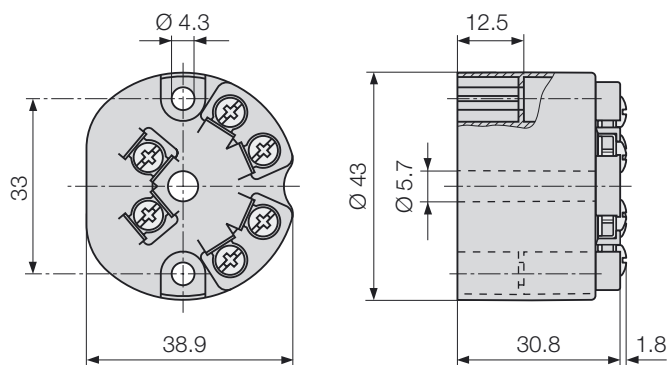


Fig. 3. SINEAX VK 636.